


Home Constructed "Joystick" Load with Johnson Matchbox, or what have you!

Why The Sucker Works Is Beyond Me? All I Know Is I Get Contacts All Over The Place On 40M. It Does Have A Narrow Bandwidth & Requires Readjustment Whenever You Move 10-15 Khz. But That's A Small Price To Pay For An Ant. That Requires So Little Room And Is So Easily Concealed!!

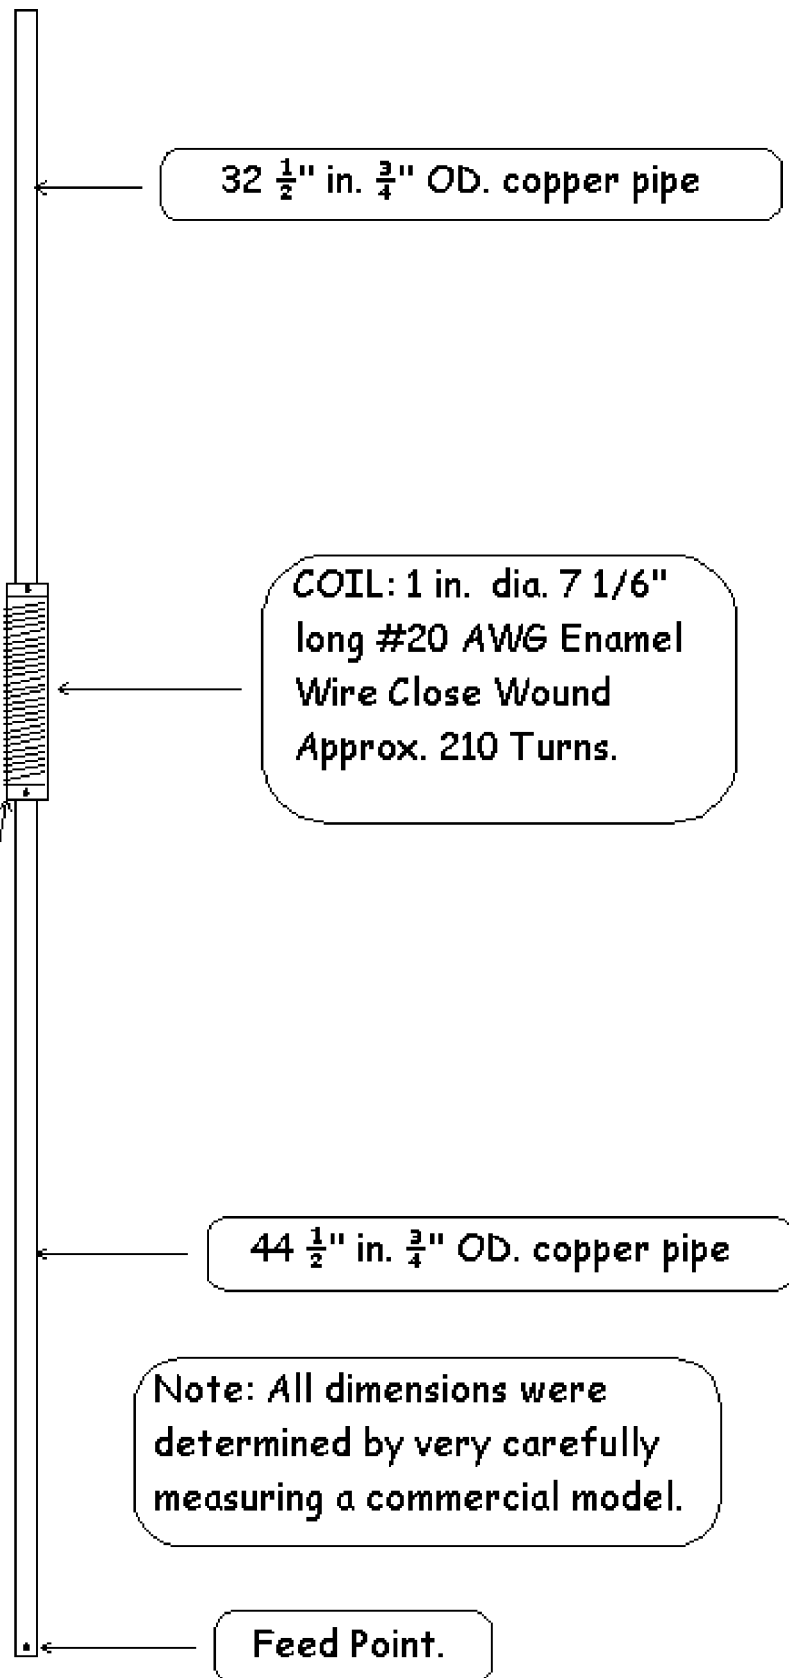

32 $\frac{1}{2}$ " in. $\frac{3}{4}$ " OD. copper pipe

COIL: 1 in. dia. 7 $\frac{1}{6}$ "
long #20 AWG Enamel
Wire Close Wound
Approx. 210 Turns.

1 In. Hardwood Dowel
With Both Ends Turned
Down To Let Copper Pipe
Slip Over For Approx. 3
In. Total Length of
Dowel Is 13 In.

44 $\frac{1}{2}$ " in. $\frac{3}{4}$ " OD. copper pipe

Note: All dimensions were
determined by very carefully
measuring a commercial model.

Ends can be capped with
rubber or plastic caps
from CTC store.

Feed Point.